


Deep Groove Ball Bearing

6200 Series-6211

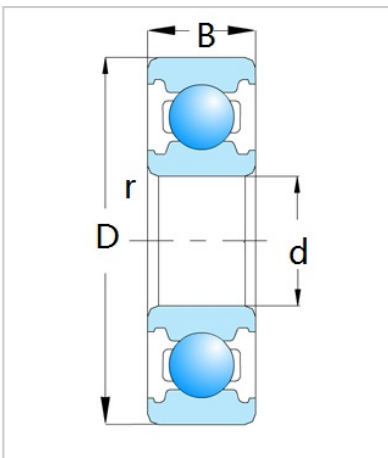

Bearing Designation

Open	<b>6211</b>
RS	6211 RS
ZZ	6211 ZZ
Dimension [mm]	
d	55
D	100
B	<b>21</b>
rs min	1.5
Basic load ratings (kN)	
Cr	43.5
Cor	29.2
Speed ratings (rpm)	
Grease	6400
Oil	7600
Weight	
(Kg)	0.601

Special feature of this series

Main dimensions according to DIN 625-1. Ball bearings of the 62 light series support relatively high radial load-ratings despite their reduced weight. Compared to deep groove ball bearings of the 63 and 64 series they require a smaller installation space at the same inside diameter by their relatively small outside diameter and allow slightly higher speeds furthermore.

Internal clearance

A standard internal clearance (CN) is suitable for the operation of the bearing in case of ordinary temperatures and for customary fits. An increased internal clearance (C3) is recommendable in case of high temperature gradients between the rings or in case of fixing the bearing through a press fit.

Seals

Plastic seals (RS/2RS) have the optimum sealing action with increased friction. Metal seals (Z/ZZ) are

suitable for higher speeds, but they have a limited sealing action as they seal contactless. Open, seal-less bearings are suitable for extremely high speeds and - furthermore - they can be regreased easily. However, they are more susceptible to soiling.

Luoyang Auto Bearing Co.,Ltd-Tel:0598-3607100-Email:moore@lyautobearing.com-http://www.auto-bearing.com