


Tapered Roller Bearing

32300 Series-32311J2

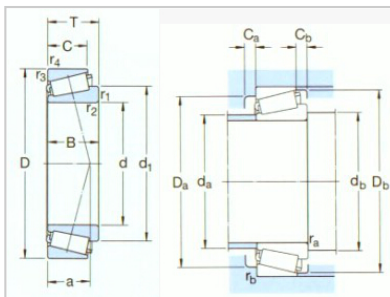

Designation	32311J2
Principal dimensions [mm]	
d1	55
D	120
B	45.5
Basic load ratings [kN]	
dyc(Cr)	198
stc(Cor)	250
Pu	28.5
Speed ratings [rpm]	
Speed Ratings	4000
Limiting Speed	5600
Weight(Kg)	2.30
ISO335	
Dimensions (ABMA)	2FD
Dimensions [mm]	
d	55
d1	84.6
B	43
C	35
r1,2(min)	2.5
r3,4(min)	2
a	29
Abutment and fillet dimensions [mm]	
da(max)	68
db(min)	65
Da(min)	99
Da(max)	112
Db(min)	111
Ca(min)	5
Cb(min)	10.5
ra(max)	2
rb(max)	2
Value	
e	0.35
Y	1.7
Yo	0.9

Tapered roller bearings have tapered inner and outer raceways and rollers to handle simultaneous radial and thrust loads. Their axial load carrying capacity is directly related to the contact angle of the rollers and raceway shaft.

They are available in single-row, double-row, and four-row designs. The individual parts of tapered roller bearings are commonly sold separately as cups and cones. Cones contain the roller assembly

and inner ring while cups include the outer ring. Full assembly units contain both the cup and cone. As separable bearings, different designs and sizes are available to accommodate a variety of applications.

Luoyang Auto Bearing Co.,Ltd-Tel:0598-3607100-Email:moore@lyautobearing.com-http://www.auto-bearing.com